


10.1 inch Rugged Tablet PC

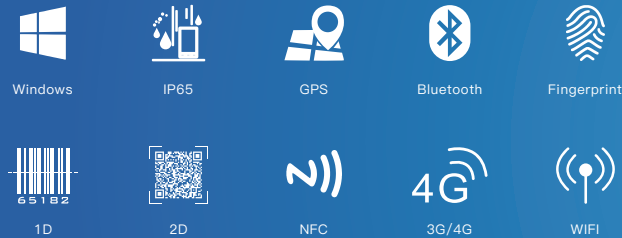

Functions

- Support for Windows 10 system
- Optional 3G/4G all network communication, WiFi, Bluetooth and other communication modes
- 10000mAh battery, 10 hours of machine endurance
- IP65 high protection level, in accordance with MIL-STD-810G
- Support GPS, more accurate positioning
- Support 5 million pixel auto focus camera, easy to collect images and video information
- Support 1D/2D, NFC, ID card and other functional modules for free selection

Product Six Views



* All technical data, specification and performance figures subject to change without notice.

***4G (LTE) is available in standard equipment. Requires IMEI registration depending on country. IMEI registration is not included in the price of the given product. In cases where 4G registration is not requested at the time of order, it is not legally possible to register IMEI after delivery.

Specification Parameter



Basic parameters

Dimension	280.4 x 187 x 26.6mm
Weight	device unit 1014g
Device Color	black
LCD	10.1 inch IPS 16:10, 800x1280/1200x1920
Touch Panel	10 point G+G capacitive touch screen Corning® Gorilla® Glass
Camera	Front 2.0MP Rear 5.0MP
I/O	HDMI 1.4a x 1, USB 2.0 Type-A x 1, Micro USB x 1, SIM Card x 1, TF Card x 1, 12pins Pogo Pin x 1, DB9 RS232 x 1, RJ45 x 1, Φ3.5mm standard earphone jack x 1, Φ3.5mm DC jack x 1
Power	AC100V ~ 240V, 50Hz/60Hz, Output DC 5V/3A

Communication

WIFI	WiFi 802.11 a/b/g/n/ac (2.4G+5.8G)
Bluetooth	BT4.2
3G/4G (Optional)	LTE FDD: B1/B3/B5/B7/B8/B20/B28A LTE TDD: B38/B40/B41 WCDMA: B1/B2/B5/B8 GSM: B2/B3/B5/B8
GNSS	Built-in GPS

Performance parameter

CPU	Intel Atom x5 Z8350
OS	Windows 10
RAM	4GB
ROM	64GB/128GB

Battery

Capacity	3.7V/10000mAh
Type	Li_polyment, removeable battery
Endurance	10hrs(default 50% volumn, default 200 nit, play 1080P HD video)

Data Collection

NFC	Optional, 13.56MHz, ISO/IEC 14443A/B, ISO/IEC 15693, ISO/IEC 18092
1D	Optional, MOTO SE655E100R
2D	Optional, Honeywell N3680
Fingerprint	Optional, FPC1020

Reliability

Operate Temperature	-20 °C ~ 60 °C
Store Temperature	-30 °C ~ 70 °C
Humidity	95% Non-Condensing
Rugged Feature	IP65 certified, MIL-STD-810G certified
Drop Height	1.22m

Accessories



Docking Charger



Removable Battery



Hand-strap



Back-strap



Leather Cover



Stylus



Vehicle Mount

Application Range

Various modules and accessories can be selected to meet customers' application in various industries.



Equipment Testing



Industrial Automation



Vehicle



Medical Treatment